

Restores flowability to bulk materials

The Vibra-Jet® bin aerator releases a controlled amount of compressed air in a circular pattern to promote gravity feed of bulk granular materials stored in bins, silos or surge hoppers. Induced aeration restores flowability to bulk materials that tend to pack during storage. It also promotes free flow of materials that tend to bridge or hang up.

Aerates along bin walls

Unlike other bin aerators, the Vibra-Jet bin aerator's air action fluidizes bulk material and gets it moving faster by aerating along bin walls. This provides a lower coefficient of friction between the wall and stored material and improves material flow. Air action not only keeps bin and hopper walls cleaner, but greatly reduces friction and greatly enhances mass flow of stored materials. Bulk materials such as bentonite, fly ash, flour, cement, feldspar, soda ash, clay, alumina or any powder finer than 20 mesh will gravity feed faster and more completely.


Features

- Aerates along bin walls
- Easily installed with optional mountings
- Optional materials of construction
- Abrasion resistant design
- Self-cleaning anti-clog design
- Vibrating action prevents build-up

Mounting Arrangement

Vibra-Jet bin aerators are installed near the discharge openings of silos, hopper or bins. Vibra-Jet bin aerators are placed in a circular pattern and in tiers so air will reach the discharge opening. More Vibra-Jet bin aerators may be required when handling materials that have a tendency to hang up or build up. The shape of the storage silo or bin is also a factor in determining the number of Vibra-Jet bin aerators required.

Vibra-Jet bin aerators should be installed no closer together than 12 inches center to center for most applications. Typically, units are installed so each air discharge pattern overlaps the ones on either side in a single row installation. In multi-tier installations, the overlap should extend upward as well. Upon request, Dynamic Air will assist you in designing a Vibra-Jet aeration system with optimum performance for your silo, bin or hopper.

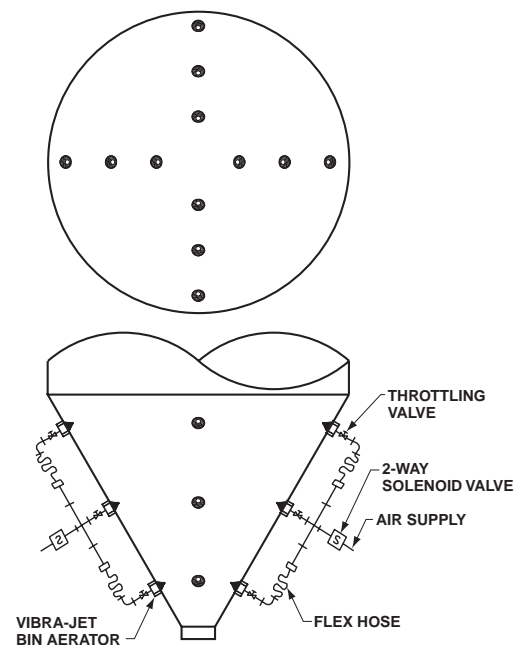


Typical round tank mounting arrangement

How the Vibra-Jet bin aerator works

High-pressure compressed air is introduced into the bin through the Vibra-Jet bin aerator in timed bursts to coincide with the start of the discharge process. The positive flow of compressed air dislodges the stored material and keeps it moving.

In addition to cleaning material from the bin walls, the rubber boot vibrates slightly to keep itself clean. Since the bursts of compressed air are generally less than 1/2 second, very little compressed air is required.

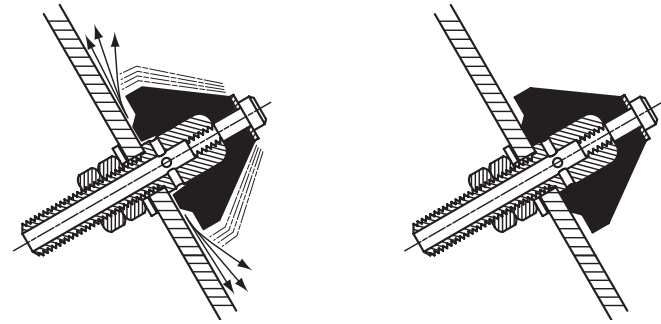


**AIR ON
CYCLE**

**AIR OFF
CYCLE**

Dimensions and specifications

1. Standard construction materials are carbon steel and black rubber for Model D Vibra-Jet bin aerators and aluminum for standard Model E and F Vibra-Jet bin aerators. Optional materials for sanitary, abrasive, corrosive or high temperature applications are available.
2. Specific air consumption, pressure and volume required will vary according to application.
3. Operating temperature: standard 150° F (66° C), optional high temperature 350° F (177° C).
4. Shipping weight Model D - 6 oz. (.20 kg);
Shipping weight Model E or F - 2 lbs. (.90 kg).

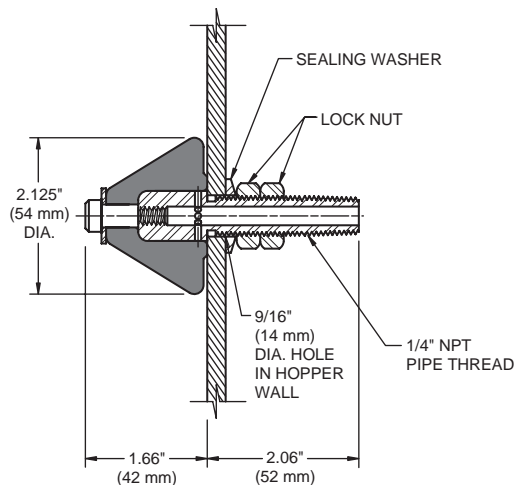


**MODEL D (for mildly abrasive materials)
INTERNAL TANK MOUNTINGS**

Air requirements

Air pressure (PSIG)	20	40	60	80	100
Air volume (SCFM)	10	20	35	55	75

Due to the variable characteristics of material, this chart only represents approximate air consumption. Minimum operating pressure is 20 PSIG.

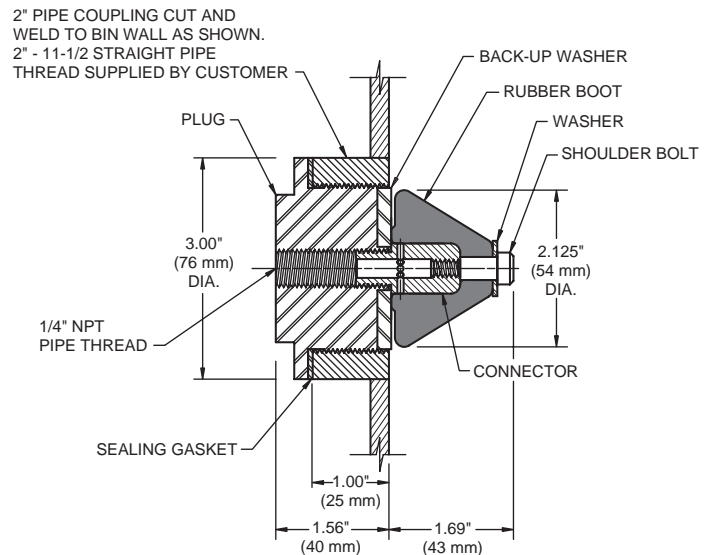

**MODEL E (for abrasive materials)
MODEL F (for highly abrasive materials)
EXTERNAL TANK MOUNTINGS**

Specifications subject to change without notice.

Dynamic Air Conveying Systems® and Vibra-Jet® are registered trademarks of Dynamic Air Inc., St. Paul, MN.

© 2007, Dynamic Air Inc. • Printed in U.S.A. • Bulletin 9803-3

DYNAMIC AIR[®]
Conveying Systems

Corporate Headquarters

Dynamic Air Inc. • St. Paul, MN USA • +1 651 484-2900

Worldwide Offices

Australia • Brazil • China • United Kingdom

www.dynamicaid.com